
2010-2A-ZI-40

Addressable fire panel component, LED indicator, 40 zones

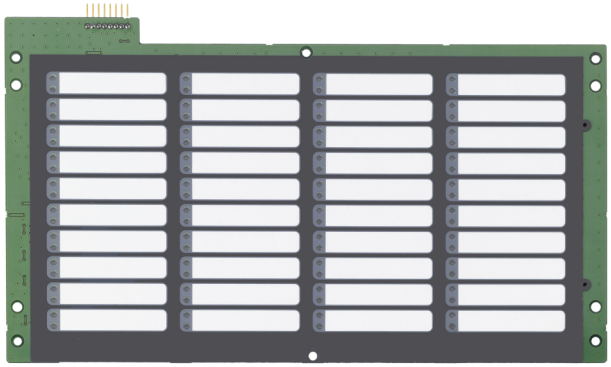

Details

- 40 zones
- 1 fire and 1 fault LED per zone
- Ample space for text
- Addressable fire panel component, LED indicator, 40 zone
- Suitable for big panel 2X-A and ZP2-A series

2010-2A-ZI-40

Addressable fire panel component, LED indicator, 40 zones

Technical specifications

Zone

Maximum zone capacity	hasta 40

Physical

Form factor	Stor
Physical dimensions	191 x 60 x 325 mm (W x H x D)
Net weight	180 g
Shipping weight	320 g
Mounting type	I kabinettet

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN54-2, EN54-4

KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 14 October 2026 - 16:52