# DD1012PI-N

## 12m Dual-Bewegungsmelder, 9 Vorhänge, Haustiertolerant, digitales Pyroelement

### Patented range gated radar technology

Motion sensors of the DD1000 Series incorporate a patented and unique range gated radar technology allowing the installer to define a clear borderline of the radar range as the radar is used to measure distance between the sensor and moving objects. Effectively the end-user will get rid of any nuisance alarms generated by movements outside the detection pattern.
Every motion sensor comes with 4 possible radar ranges selectable via dip switches allowing the detection pattern to be tailored according to the room where the motion sensor is installed.
The radar operates on 5.8GHz frequency and will not interfere with any WiFi networks.

The DD1012PI-N motion sensor incorporates a new digital pyro for an improved signal quality and a better immunity to electrical interferences.

### PIR technology in combination with patented mirror optics

Our patented optical mirror technology gives the advantage of gliding focus, which creates a continuous detection curtain from floor level up to installation height.
Within our DD1012 series we are using a dual element pyro generating 2 volumetric curtains for each of the 9 curtain sets.
The DD1012PI is designed to be immune for pets up to 18 kg of weight (about 35 cm of height).

### Detection technologies working together

These dual tech motion sensors generate an alarm depending on what both technologies – range gated radar and PIR – saw within its detection coverage.
But our dual tech go beyond a simple “AND” function : it classifies the signals from each technology – range gated radar and PIR – to have the best alarm result without being sensitive for nuisance signal sources. This technology creates a uniform sensitivity in all course directions.

### Ease and flexibility of installation

1. Tolerates wall angle deviation and different mounting heights.
2. Limited loss of coverage when objects are placed in the field of the PIR vision.
3. Easy range setting via dip switches of the range gated radar in order to tailor the detection pattern to your needs.
4. Multiple build-in End-Of-Line resistor values with “easy wiring” option available.
5. Plug-in connector.

### Other members of the family

This family includes motion sensors with variants in detection range, two types of anti-masking masking technology and Pet Immunity.



### Einzelheiten

- Patentierte, wählbare Range-Gated-Radar-Technologie, die die Radarerfassungsgrenze klar definiert
- PIR-Technologie mit patentierter Spiegelvorhang-Optik
- Haustiertoleranz bis zu 18 kg (ca. 35 cm Höhe)
- Intelligente Alarmentscheidung auf Basis der Signalklassifizierung des PIR- und Radar-Alarms
- Automatische kontinuierliche Selbstdiagnose bei allen Technologien
- Grüner Modus: Option zum Abschalten der Radartechnologie, wenn das Sicherheitssystem nicht scharf ist
- Mehrere Sicherheitszulassungen, darunter EN Klasse II
- Verfügt über ein neues digitales Pyroelement, das die Temperaturschwankungen mit hoher Präzision erkennt

The consistent family aesthetics between the various models ensure a professional approach when installing different sensor types.

# DD1012PI-N

## 12m Dual-Bewegungsmelder, 9 Vorhänge, Haustiertolerant, digitales Pyroelement

## Technische Spezifikationen

### General

| | |
|---|---|
| Technology | Dual |
| Application type | Wandmontage |
| Anti masking | No |
| Pet immune | Yes |
| Camera | No |
| Pry-off tamper kit | ST400 |
| Detector start-up time | 60 s |

### Detection

| | |
|---|---|
| Max. detection range | 12 m |
| Detection range selection | 4, 6, 9 oder 12 m über Dip-Schalter wählbar |
| No. of curtains | 9 |
| Coverage (field of view) | 78° |
| Microwave frequency (nom.) | 5.8 GHz |
| Max. microwave output (at 1m) | 0.003 µW/cm² |
| Undercrawl protection | Yes |
| Target speed range | 0.2 bis 3.0 m/s |
| Alarm memory | Yes |
| Alarm time | 3 sek |
| Peak-to-peak ripple immunity | 2 V (bei 12 VDC) |

### Wired/wireless

| | |
|---|---|
| Wired-wireless | Verdrahtet |

### Inputs/outputs

| | |
|---|---|
| Alarm relay characteristic | NC, 80 mA 30 VDC, Form A |
| Tamper relay characteristic | NC, 80 mA 30 VDC, Form A |
| Relay configuration | Mehrere EOL-Werte |
| Remote control lines | Tag/Nacht, Gehtest |

### Electrical

| | |
|---|---|
| Operating voltage | 9 bei 15 VDC (12 V nominal) |
| Power supply type | 12 VDC |
| Current consumption | 8 mA nominal |

### Physical


| | |
|---|---|
| Physical dimensions | 126 x 63 x 50 mm |
| Net weight | 120 g |
| Colour | Weiß |
| Mounting height | 1,8 bis 3 m |

### Environmental

| | |
|---|---|
| Operating temperature | -10 bis 55°C |
| Relative humidity | 95% max. nicht kondensierend |
| Environment | Drinnen |
| IP rating | IP30<br>IK04 |

### Regulatory

| | |
|---|---|
| EN50131 grade | Klasse 2 |

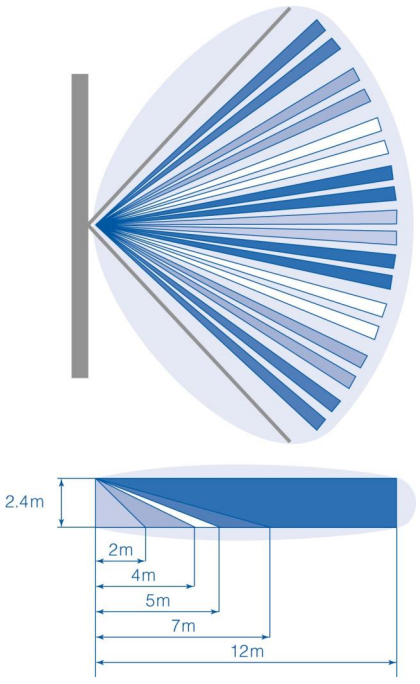


Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.